


VICTOR

SWING TYPE AUTOMATION GATES

YOUR INNOVATIVE HOME IMPROVEMENT SYSTEM

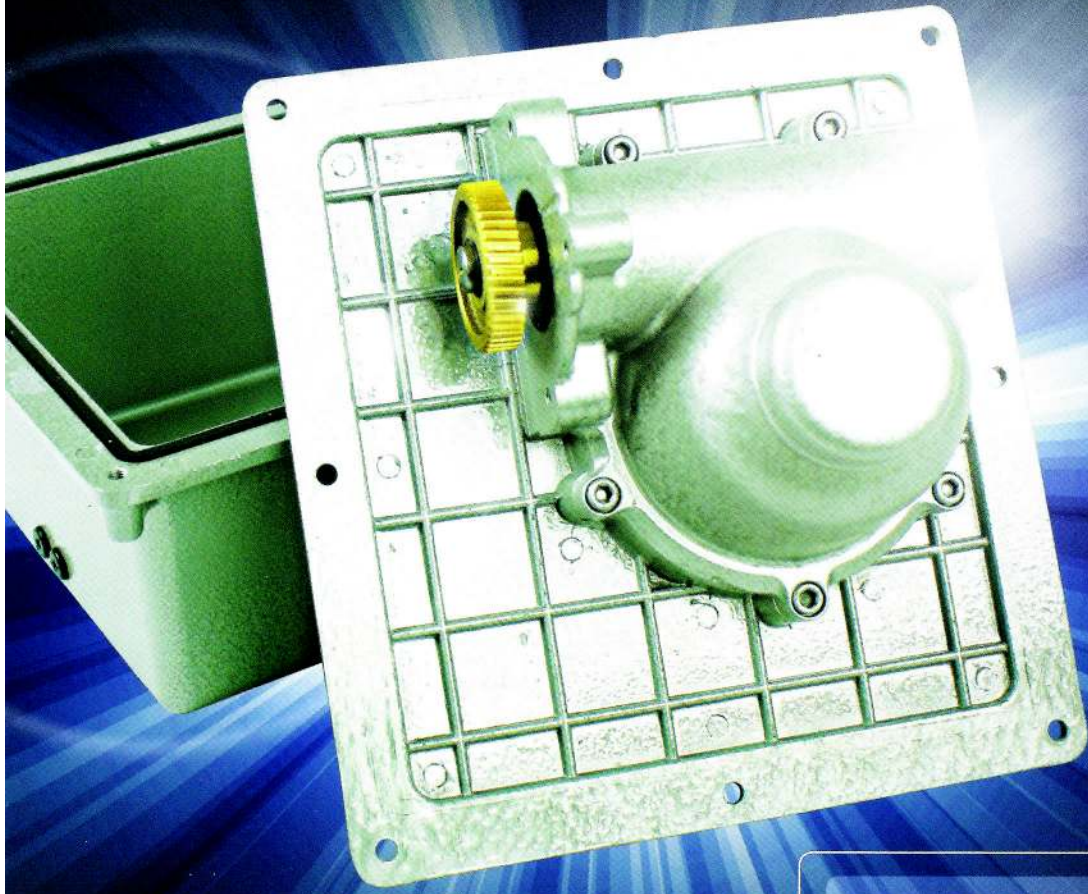

SPECIAL PROTECTION

Our system is equipped with a high current sensor controller to protect the DC motor, lock coil, and gear box from damage and hence enabling a lifespan 3 times of the conventional type.

COPPER BRASS PINION GEAR

Heavy Duty
Longer Lifespan



RUBBER GASKET & WIRE BUSH

Waterproof
Safe



SPECIFICATIONS

Model	
Descriptions	DC motor for residential applications
Operating Voltage	DC 24V Supply
Output Power	120W / DC Motor
Max. Weight of Gate	400kg / Leaf
Rotary Speed	8 sec. / 90 degree
Transmission Type	Rotary Lever 360 degree
Dual Speed	Yes
Safety Device	Mechanical Clutch (Patented)
IR Safety Beam	Optional
Safety Limit Timer	Yes. High current sensor (Master timer)
Automatic Lightning Control	Yes. Including photo sensor control
Remote Controller	2 channel UHF PWM
Electric Lock	Yes
Upgrade Copper Gear	Optional

ACCESSORIES

SOLENOID LOCK

24V Direct Current, Solid Steel Locking Stopper coated with Hard PVC, Manual Override Incase Power Failure.



TRANSMITTER

Battery Operated, UHF, Frequency Modulated Radiowave, 330 MHz Transmission Band, 30m Effective Range and 50m Maximum Range.




ACTUATOR ARM & BRACKET

Made of Nickel-Chrome Plated Iron.



CONTROL UNIT

Dual Speed Gate Control, Automatic Lighting Control, 1 Gate-leaf Operation, Half-way Stop Operation, Emergency Stop Operation.

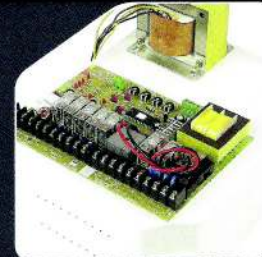

Dealer:

Due to our continuous improvement to our products, some specifications may be different from the list. Some features may not be available due to difference among our marketing zones and may also due to some restriction from local authority of your country.

Please refer to the local authorised dealer for details.